



FOR SECTION D-D
SEE STD. PLAN C-12

PLAN

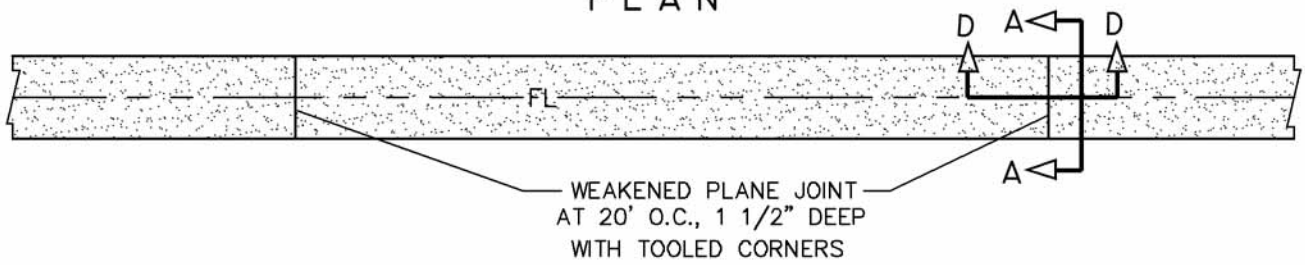


WEAKENED PLANE JOINT
AT 20' O.C., 1 1/2" DEEP
WITH TOOLED CORNERS

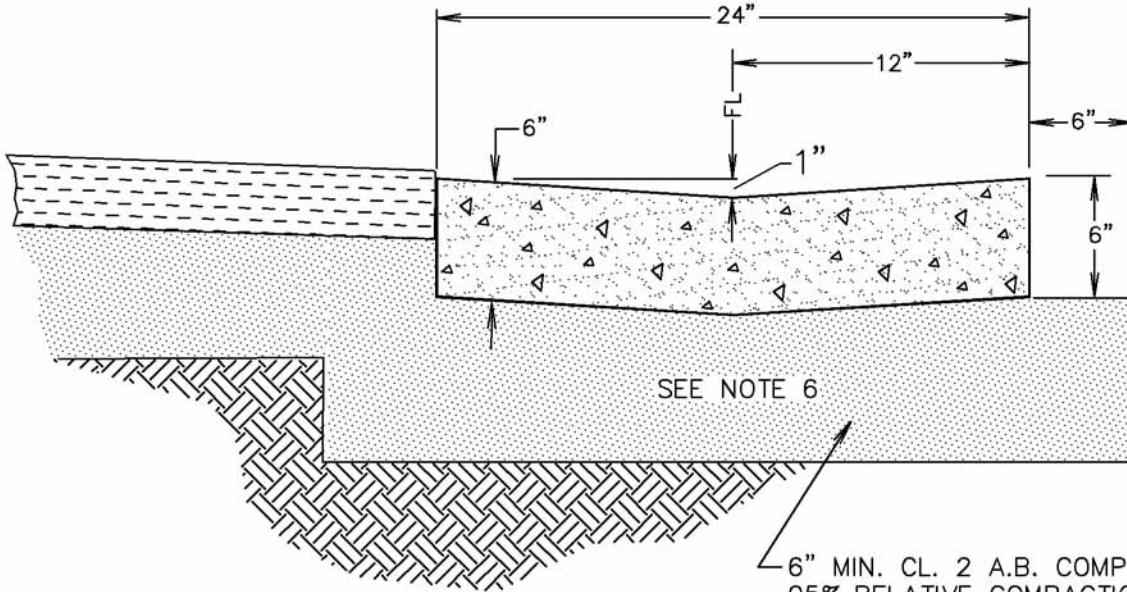

SECTION A-A

6" MIN. CL. 2 A.B. COMPACTED TO
95% RELATIVE COMPACTION.
SATURATE WITH WATER PRIOR
TO POURING CONCRETE.

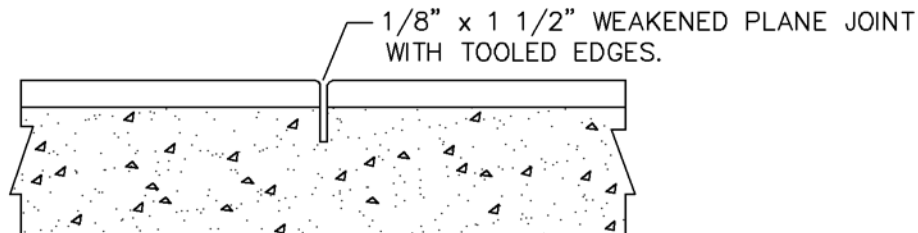

SECTION D-D
WEAKENED PLANE JOINT

LOCATIONS : DRIVE APPROACHES, SIDEWALK AT 20' O.C.,
CURB & GUTTER AT 20' O.C. AND V-GUTTER AT 20' O.C.

NOTES :

1. CONCRETE WORK SHALL BE 2500 P.S.I. DESIGN (5 SACK MIX). 4" MAX. SLUMP.
2. ALL CONCRETE SHALL HAVE A LIGHT BROOM FINISH, EXCEPT AS NOTED.
3. 1/2" EXPANSION JOINT AT CONNECTION TO ALLEY APPROACH, SEE STD. PLAN C-12.
4. WEAKENED PLANE JOINTS SHALL BE CONSTRUCTED AT 20' CENTERS AND SHALL BE A MIN. DEPTH OF 1 1/2" AND SHALL BE FINISHED WITH A SCORING TOOL LEAVING THE EDGES ROUNDED. SEE STD. PLAN C-12.
5. FINISHED SURFACES SHALL BE TREATED WITH CLEAR CURING COMPOUND COMPLYING WITH SECTION 201-4 OF THE STANDARD SPECIFICATIONS.
6. REFER TO STANDARD PLAN C-13.
7. REPAIRS SHALL BE MADE BY REMOVING & REPLACING THE ENTIRE UNIT BETWEEN JOINTS.

CITY OF PORTERVILLE
ENGINEERING DIVISION

Baldemar Rodriguez 9-04
DIRECTOR OF PUBLIC WORKS R.C.E. 45304 DATE

CONCRETE
"V" GUTTER

C-9

REV.